


MTZ-FU 50-29-105 HD

Specialized High Speed Door Operator

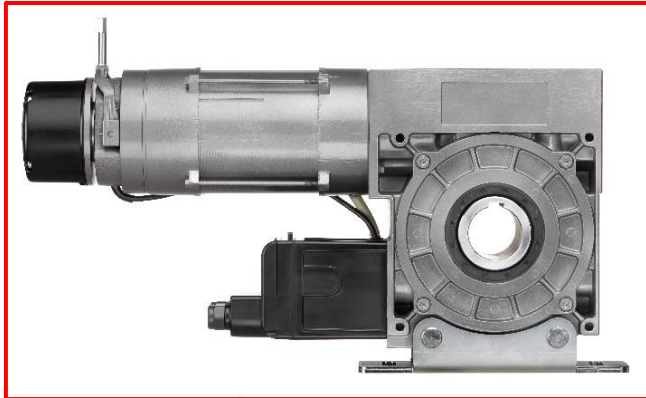

HIGH-SPEED DOOR DRIVE
 For Operation With a
 Frequency Converter

FEATURES

- Heavy Duty (HD)
- High holding force via additional magnetic brake
- Integrated Safety Catch
- Programmable limits (AWG)
- Emergency hand crank or hand chain for emergency operation
- Straightforward conversion from crank to chain
- Thermal overload protection
- Higher Torque models available
- Custom versions on request

SPECIFICATIONS

VOLTAGE	400V AC @ 50Hz (Three Phase)
CURRENT RATING	8.8 A
DRIVE TORQUE	290Nm @ 50Hz (203Nm @ 87Hz)
MOTOR OUTPUT	4.0 kW
DUTY CYCLE	45 operations / Hour (Dependent on door size)
SHAFT DIAMETER	50mm
PROTECTION	IP54
DIMENSIONS	614 x 174 x 375mm
WEIGHT	48 Kg
TEMPERATURE RANGE	-20° to +60°C

(The Company reserves the right to amend product specifications and information without notice.)

PLEASE CONTACT OUR SALES TEAM +(27) 31 700 8260 for further information.

PART OF THE MARANTEC COMPANY GROUP
OPENING DOORS IN SOUTH AFRICA

PROUD SUPPORTERS AND SUPPLIERS OF:

