


STA1-14-19 380V/3PH 60% Spring Balanced Sectional Door Operator

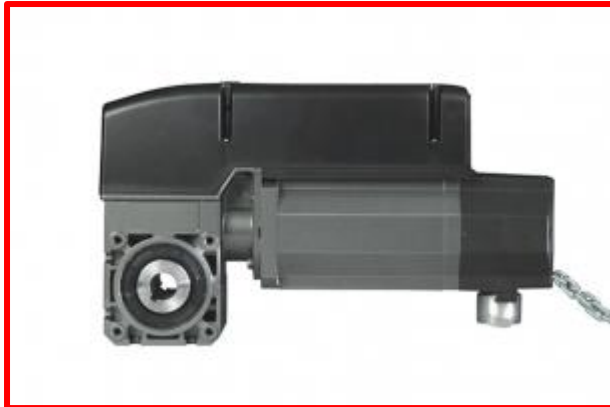

**For Spring Balanced
 Sectional Doors**

FEATURES

- 3 Phase 380V
- Emergency hand chain available (standard)
- Emergency hand chain with maintenance release available (by request)
- Integrated Safety Catch
- Robust, Strong & Durable
- Wide Range of Control Options
- Thermal Overload Protection

SPECIFICATIONS

VOLTAGE	380V / 3 PH
CURRENT INPUT	2.4 A – 3.5A
TORQUE	140 Nm
MOTOR OUTPUT	0.65 kW
SPEED	19 Rpm
DUTY CYCLE	20 operations / Hour (Dependent on door size)
SHAFT DIAMETER	25.4mm (6.35mm keyway)
TEMPERATURE RANGE	-20° to +60°
PROTECTION	IP65
DIMENSIONS	429 x 104 x 245mm
WEIGHT	15 Kg

(The Company reserves the right to amend product specifications and information without notice.)

PLEASE CONTACT OUR SALES TEAM +(27) 31 700 8260 for further information.

**PART OF THE MARANTEC COMPANY GROUP
 OPENING DOORS IN SOUTH AFRICA**

PROUD SUPPORTERS AND SUPPLIERS OF:

