


# MDF70-200-8-HD

## Direct Drive 380V Automation for Sprung Roller Shutters

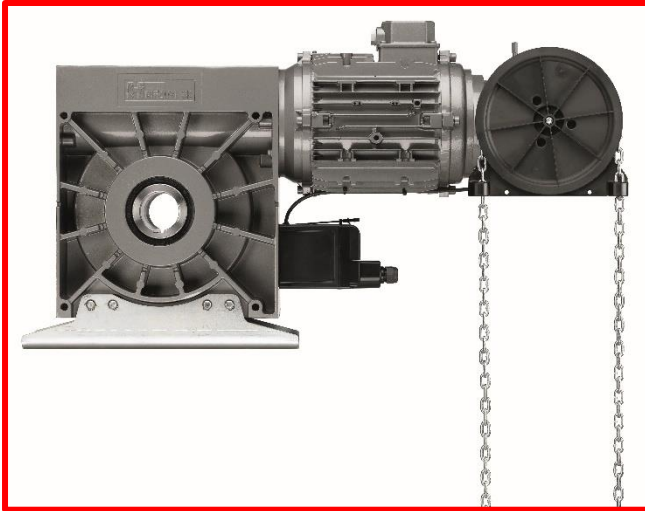

**DIRECT DRIVE**  
**Quality High Use**  
**Automation**  
**For Spring Balanced**  
**Roller Shutters**

### FEATURES

- High Use (HD)
- Integrated Programmable limits system
- Crank or Chain Manual Override Options
- Integrated Safety Catch
- Robust, Strong & Durable
- Wide Range of Control Options
- 3 Phase 380V
- Thermal Overload Protection
- Higher Torque Models available up to 2000 Nm

### SPECIFICATIONS

VOLTAGE	380V AC @ 50 Hz (Three Phase)
CURRENT INPUT	8.1 A
TORQUE	2000 Nm
MOTOR OUTPUT	2.5 kW
SPEED	8 Rpm
DUTY CYCLE	30 operations / Hour (Dependent on door size)
SHAFT DIAMETER	55 mm (16mm keyway)
PROTECTION	IP54
DIMENSIONS	779 x 216 x 491mm
WEIGHT	81 Kg

(The Company reserves the right to amend product specifications and information without notice.)

**PLEASE CONTACT OUR SALES TEAM +(27) 31 700 8260 for further information.**

**PART OF THE MARANTEC COMPANY GROUP**  
**OPENING DOORS IN SOUTH AFRICA**

PROUD SUPPORTERS AND SUPPLIERS OF

