


# SENSABLE SENSORS LOOP DETECTOR

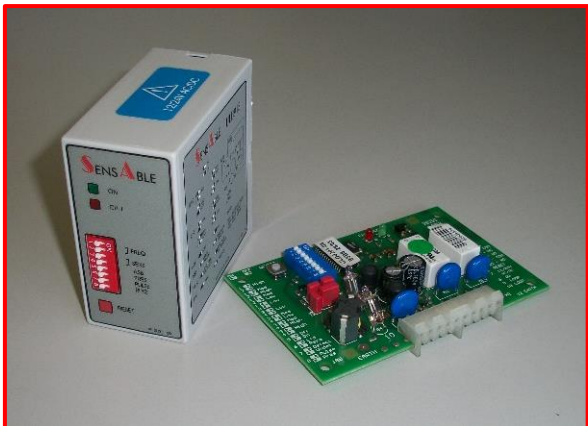

## IDEAL INDUCTIVE LOOP DETECTOR For

- **Parking Barriers**
- **Industrial Door Access Control**
- **Vehicle Access Control**
- **Motorized Gates and Doors**

FEATURES	
<ul style="list-style-type: none"> <li>• Single or dual channel configurations</li> <li>• Self-tuning range</li> <li>• Strong loop field strength</li> <li>• High interference immunity</li> <li>• Selectable output configuration</li> <li>• Permanent presence feature</li> <li>• Direction logic on dual channel</li> <li>• Compact housing</li> </ul>	
SPECIFICATIONS	
VOLTAGE	230V AC or 12/24V DC
CURRENT CONSUMPTION	100 Ma max
TEMPERATURE RANGE	-40° to +80°C
INDICATIONS	2 LED's Green: Power Red: Output per channel
SENSITIVITY	Four steps adjustable: High Medium High Medium Low Low
INDUCTIVE RANGE	20 – 1500uH
DIMENSIONS	76 x 40 x 75mm

(The Company reserves the right to amend product specifications and information without notice.)

**PLEASE CONTACT OUR SALES TEAM for further information.**  
**PART OF THE MARANTEC COMPANY GROUP - OPENING DOORS IN SOUTHERN AFRICA**

PROUD SUPPORTERS AND SUPPLIERS OF:

