


DTDC DIRECT DRIVE 380V Automation for Sprung Roller Shutters

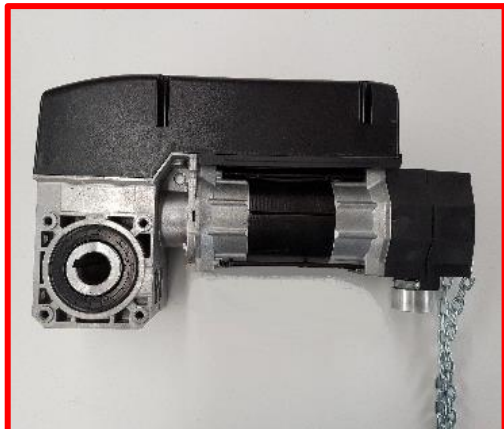

**Cost Effective
 DIRECT DRIVE
 Quality Automation
 For Spring Balanced
 Roller Shutters**

FEATURES

- Integrated Mechanical Limit Switches
- Thermal Overload Protection
- Chain Manual Override (crank or chain)
- Robust, Strong & Durable
- Flexible Control Options
- Up to 13 Revolutions
- Noise level <70 dB
- 3 Phase 380V

SPECIFICATIONS

VOLTAGE	400V AC @ 50 Hz (Three Phase)
CURRENT RATING	1.9 A
TORQUE	140 Nm
MOTOR OUTPUT	0.45 kW
SPEED	12 Rpm
DUTY CYCLE	60% < 20 operations / Hr (Dependent on door size)
SHAFT DIAMETER	30 mm (8mm keyway)
PROTECTION	IP54
OPERATOR DIMENSIONS	361 x 105 x 245 mm
WEIGHT	Approx. 16 Kg

(The Company reserves the right to amend product specifications and information without notice.)

PLEASE CONTACT OUR SALES TEAM for further information.

PART OF THE MARANTEC COMPANY GROUP - OPENING DOORS IN SOUTHERN AFRICA

PROUD SUPPORTERS AND SUPPLIERS OF:

