


MDF70-200-8-HD

Direct Drive 380V Automation for Sprung Roller Shutters

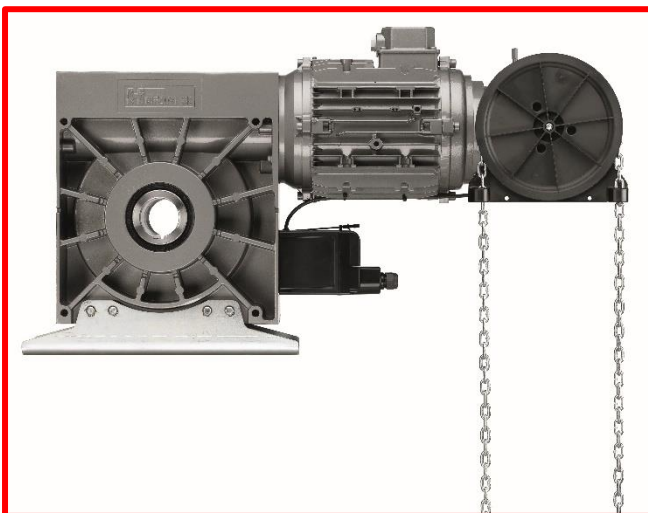

***DIRECT DRIVE
 Quality High Use
 Automation
 For Spring Balanced
 Roller Shutters***

FEATURES

- High Use (HD)
- Integrated Programmable limits system
- Crank or Chain Manual Override Options
- Integrated Safety Catch
- Robust, Strong & Durable
- Wide Range of Control Options
- 3 Phase 380V
- Thermal Overload Protection
- Higher Torque Models available up to 2000 Nm

SPECIFICATIONS

VOLTAGE	380V AC @ 50 Hz (Three Phase)
CURRENT INPUT	8.1 A
TORQUE	2000 Nm
MOTOR OUTPUT	2.5 kW
SPEED	8 Rpm
DUTY CYCLE	30 operations / Hour (Dependent on door size)
SHAFT DIAMETER	55 mm (16mm keyway)
PROTECTION	IP54
DIMENSIONS	779 x 216 x 491mm
WEIGHT	81 Kg

(The Company reserves the right to amend product specifications and information without notice.)

PLEASE CONTACT OUR SALES TEAM for further information.

PART OF THE MARANTEC COMPANY GROUP - OPENING DOORS IN SOUTHERN AFRICA

PROUD SUPPORTERS AND SUPPLIERS OF:

